



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

Revision History

<u>Rev. No.</u>	<u>History</u>	<u>Issue Date</u>
1.0	Initial Issue	Dec.17,2004
1.1	Update the WRITE CYCLE1 (Write Enable Controlled) waveform	Mar.29,2005
1.2	Add 55ns spec.	Apr. 13,2006
1.3	Add I _{CCSB} characteristic in page 6	May. 16,2006
1.4	Revise DC characteristics	Apr. 21, 2008



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ GENERAL DESCRIPTION

The CS18LV00645 is a high performance, high speed and super low power CMOS Static Random Access Memory organized as 8,192 words by 8bits and operates from a single 4.5V to 5.5V supply voltage. Advanced CMOS technology and circuit techniques provide both high speed, super low power features and maximum access time of 55/70ns in 5.0V operation. Easy memory expansion is provided by using two chip enable inputs (/CE1, CE2) and active LOW output enable (/OE).

The CS18LV00645 has an automatic power down feature, reducing the power consumption significantly when chip is deselected. The CS18LV00645 is available in JEDEC standard 28-pin SOP(300 mil) and PDIP (600 mil) packages.

■ FEATURES

- Operation voltage : 4.5 ~ 5.5V
- Ultra low power consumption:
Operating current 1mA@1MHz ,Vcc=5.0V& CMOS standby current 10uA (Max) in Vcc=5.0V
- High speed access time: 55/70ns.
- Automatic power down when chip is deselected.
- Three state outputs and TTL compatible.
- Data retention supply voltage as low as 2.0V.
- Easy expansion with /CE1, CE2 and /OE options.

■ PRODUCT FAMILY

Product Family	Operating Temp.	Vcc Range	Speed (ns)	Standby Current (Typ.) I _{CCSB1}	Package Type
CS18LV00645	0~70°C	4.5~5.5V	55/70	1.0uA	28 SOP
					28 PDIP
					Dice
	-40~85°C		55/70	1.0uA	28 SOP
					28 PDIP
					Dice




High Speed Super Low Power SRAM


8K-Word By 8 Bit

CS18LV00645

PIN CONFIGURATIONS

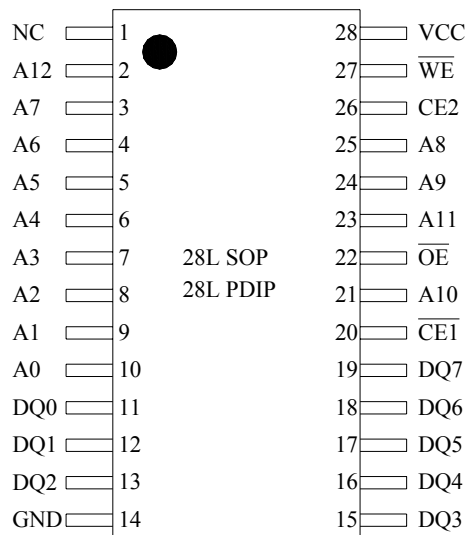

FUNCTIONAL BLOCK DIAGRAM

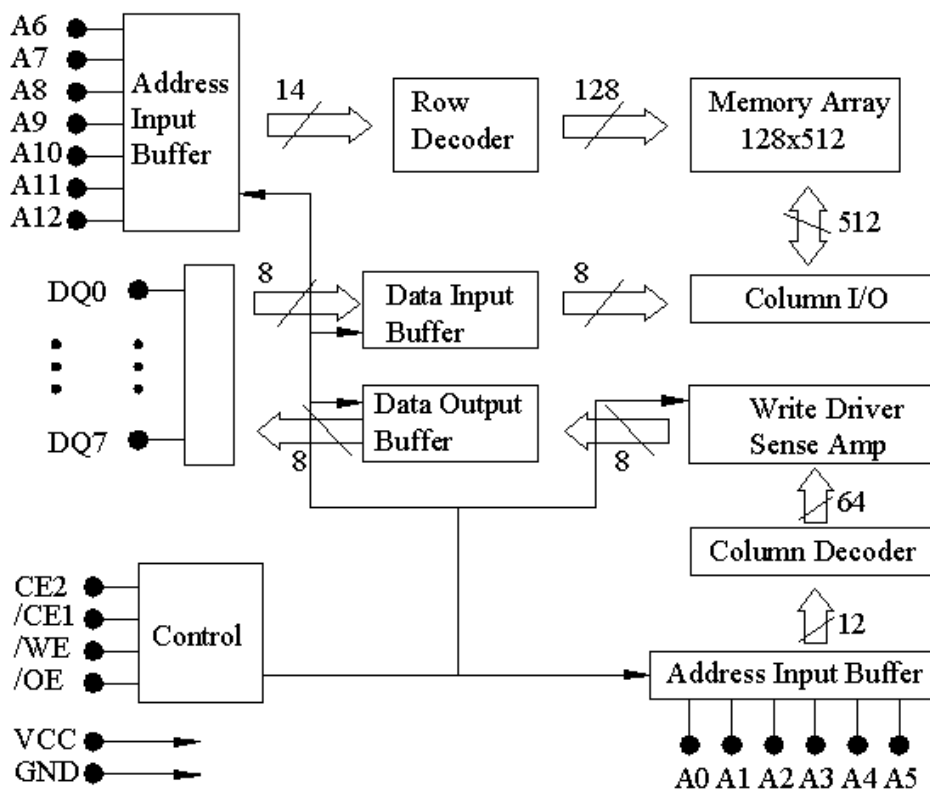



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ PIN DESCRIPTIONS

Name	Type	Function
A0 – A12	Input	Address inputs for selecting one of the 8,192 x 8 bit words in the RAM
/CE1,CE2	Input	/CE1 is active LOW and CE2 is active HIGH. Both chip enables must be active when data read from or write to the device. If either chip enable is not active, the device is deselected and in a standby power down mode. The DQ pins will be in high impedance state when the device is deselected.
/WE	Input	The Write enable input is active LOW. It controls read and write operations. With the chip selected, when /WE is HIGH and /OE is LOW, output data will be present on the DQ pins, when /WE is LOW, the data present on the DQ pins will be written into the selected memory location.
/OE	Input	The output enable input is active LOW. If the output enable is active while the chip is selected and the write enable is inactive, data will be present on the DQ pins and they will be enabled. The DQ pins will be in the high impedance state when /OE is inactive.
DQ0~DQ7	I/O	These 8 bi-directional ports are used to read data from or write data into the RAM.
Vcc	Power	Power Supply
Gnd	Power	Ground
NC		No connection

■ TRUTH TABLE

MODE	/CE1	CE2	/WE	/OE	DQ0~7	Vcc Current
Standby	H	X	X	X	High Z	I_{CCSB} , I_{CCSB1}
	X	L	X	X		
Output Disable	L	H	H	H	High Z	I_{CC}
Read	L	H	H	L	D _{OUT}	I_{CC}
Write	L	H	L	X	D _{IN}	I_{CC}



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ ABSOLUTE MAXIMUM RATINGS⁽¹⁾

Symbol	Parameter	Rating	Unit
V_{TERM}	Terminal Voltage with Respect to GND	-0.5 to $V_{\text{CC}}+0.5$	V
T_{BIAS}	Temperature Under Bias	-40 to +125	°C
T_{STG}	Storage Temperature	-65 to +150	°C
P_{T}	Power Dissipation	1.0	W
I_{OUT}	DC Output Current	50	mA

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

■ OPERATING RANGE

Range	Ambient Temperature	V_{CC}
Commercial	0~70°C	4.5 ~ 5.5V
Industrial	-40~85°C	4.5 ~ 5.5V

■ CAPACITANCE⁽¹⁾($T_A=25^\circ\text{C}$, $f=1.0\text{MHz}$)

Symbol	Parameter	Conduction	MAX.	Unit
C_{IN}	Input Capacitance	$V_{\text{IN}}=0\text{V}$	8	pF
C_{DQ}	Input/Output Capacitance	$V_{\text{DI/O}}=0\text{V}$	10	pF

1. This parameter is guaranteed, and not 100% tested.



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ DC ELECTRICAL CHARACTERISTICS (TA = 0° ~70°C, VCC = 5.0V)

Name	Parameter	Test Condition	MIN	TYP ⁽¹⁾	MAX	Unit
V_{IL}	Guaranteed Input Low Voltage ⁽²⁾	V _{CC} =5.0V	-0.5		0.8	V
V_{IH}	Guaranteed Input High Voltage ⁽²⁾	V _{CC} =5.0V	2.4		V _{CC} +0.2	V
I_{IL}	Input Leakage Current	V _{CC} =MAX, V _{IN} =0 to V _{CC}	-1		1	uA
I_{OL}	Output Leakage Current	V _{CC} =MAX, /CE1=V _{Ih} , or CE2= V _{IL} , or /OE=V _{Ih} , or /WE= V _{IL} V _{IO} =0V to V _{CC}	-1		1	uA
V_{OL}	Output Low Voltage	V _{CC} =MAX, I _{OL} =2.1mA			0.4	V
V_{OH}	Output High Voltage	V _{CC} =MIN, I _{OH} = -1mA	2.4			V
I_{CC}	Operating Power Supply Current	/CE1=V _{IL} , I _{DQ} =0mA, F=F _{MAX} =1/ t _{RC}			30	mA
I_{CCSB1}	CMOS Standby Current	/CE1 ≥ V _{CC} -0.2V, CE2= 0.2V, V _{IN} ≥ V _{CC} -0.2V or V _{IN} ≤ 0.2V,		1	10	uA

1. Typical characteristics are at TA = 25°C.

2. These are absolute values with respect to device ground and all overshoots due to system or tester noise are included.



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645


■ DATA RETENTION CHARACTERISTICS (TA = 0° ~70°C)

Name	Parameter	Test Condition	MIN	TYP ⁽¹⁾	MAX	Unit
V _{DR}	V _{CC} for Data Retention	/CE1 ≥ V _{CC} -0.2V, V _{IN} ≥ V _{CC} -0.2V or V _{IN} ≤ 0.2V	2.0			V
I _{CCDR}	Data Retention Current	/CE1 ≥ V _{CC} -0.2V, V _{CC} =2V V _{IN} ≥ V _{CC} -0.2V or V _{IN} ≤ 0.2V		0.3	2.0	uA
T _{CDR}	Chip Deselect to Data Retention Time	Refer to Retention Waveform	0			ns
t _R	Operation Recovery Time		t _{RC} (2)			ns

1. TA = 25°C

2. t_{RC} = Read Cycle Time

■ LOW V_{CC} DATA RETENTION WAVEFORM(1) (/CE1 Controlled)

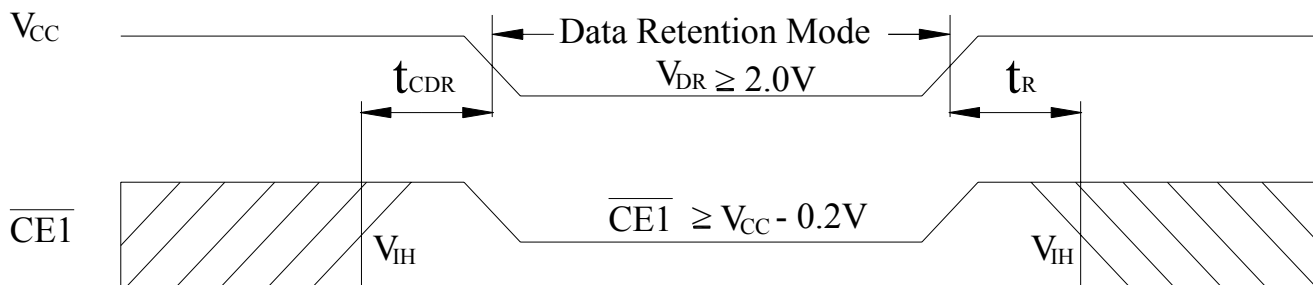




High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ LOW V_{CC} DATA RETENTION WAVEFORM (2) (CE2 Controlled)

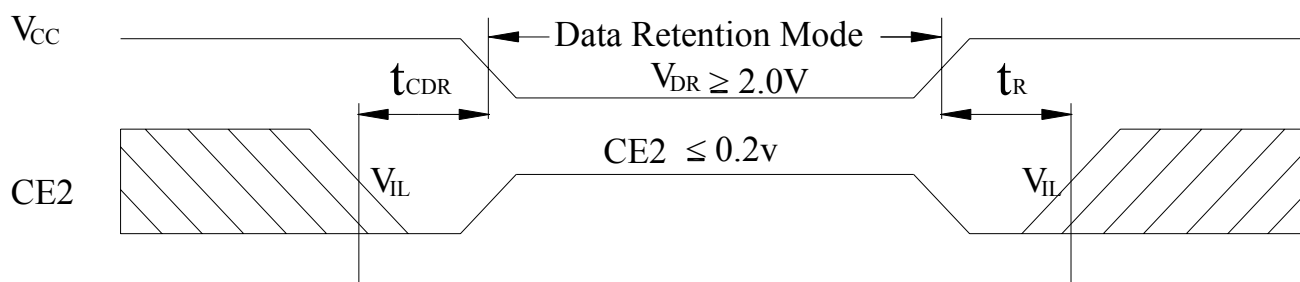

■ AC TEST CONDITIONS

Input Pulse Levels	$V_{CC}/0V$
Input Rise and Fall Times	5ns
Input and Output Timing Reference Level	$0.5V_{CC}$
Output Load	See FIGURE 1A and 1B

■ KEY TO SWITCHING WAVEFORMS

WAVEFORMS	INPUTS	OUTPUTS
	MUST BE STEADY	MUST BE STEADY
	MAY CHANGE FROM H TO L	WILL BE CHANGE FROM H TO L
	MAY CHANGE FROM L TO H	WILL BE CHANGE FROM L TO H
	DON'T CARE ANY CHANGE PERMITTED	CHANGE STATE UNKNOWN
	DOES NOT APPLY	CENTER LINE IS HIGH IMPEDANCE OFF STATE






High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

■ AC TEST LOADS AND WAVEFORMS

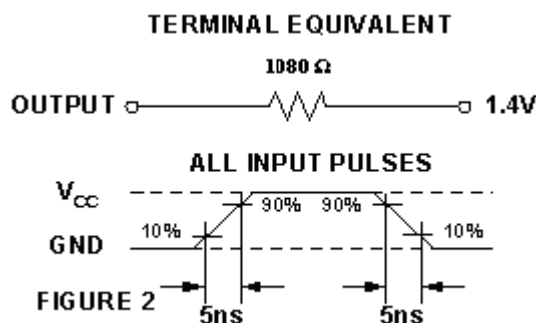


■ AC ELECTRICAL CHARACTERISTICS (0°C~70°C ; Vcc=5V) < READ CYCLE >


JEDEC Name	Symbol	Description	-55		-70		Unit
			MIN	MAX	MIN	MAX	
t _{AVAX}	t _{RC}	Read Cycle Time	55		70		ns
t _{AVQV}	t _{AA}	Address Access Time		55		70	ns
t _{ELQV}	t _{ACE}	Chip Select Access Time		55		70	ns
t _{GLQV}	t _{OE}	Output Enable to Output Valid		30		50	ns
t _{ELQX}	t _{CLZ} ⁽⁵⁾	Chip Select to Output Low Z	10		10		ns
t _{GLQX}	t _{OLZ} ⁽⁵⁾	Output Enable to Output in Low Z	5		5		ns
t _{EHQZ}	t _{CHZ} ⁽⁵⁾	Chip Deselect to Output in High Z	0	35	0	35	ns
t _{GHQZ}	t _{OHZ} ⁽⁵⁾	Output Disable to Output in High Z	0	30	0	30	ns
t _{AXOX}	t _{OH}	Address Change to Out Disable	10		10		ns

SWITCHING WAVEFORMS (READ CYCLE)


READ CYCLE 1 ^[1,2,4]

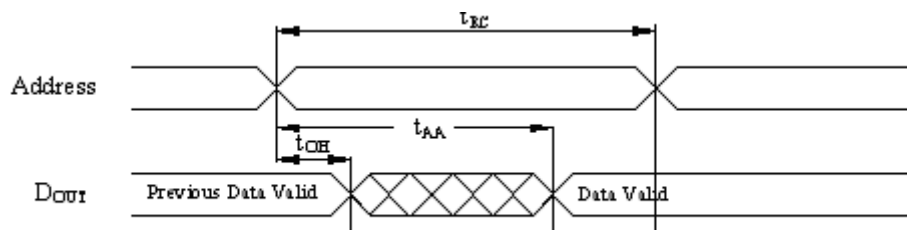

READ CYCLE 2 ^[1,3,4]

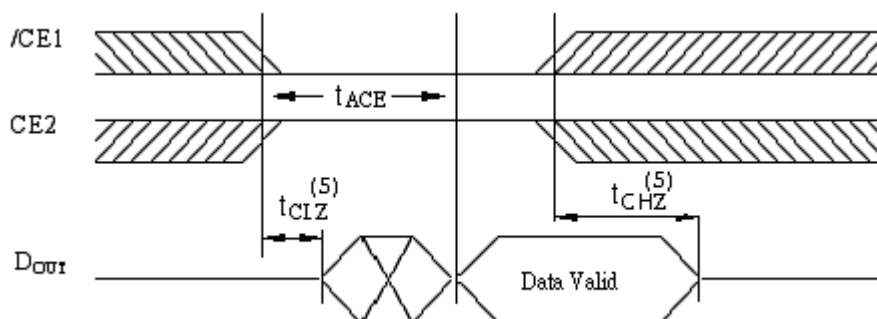

READ CYCLE 3 ^[1,4]

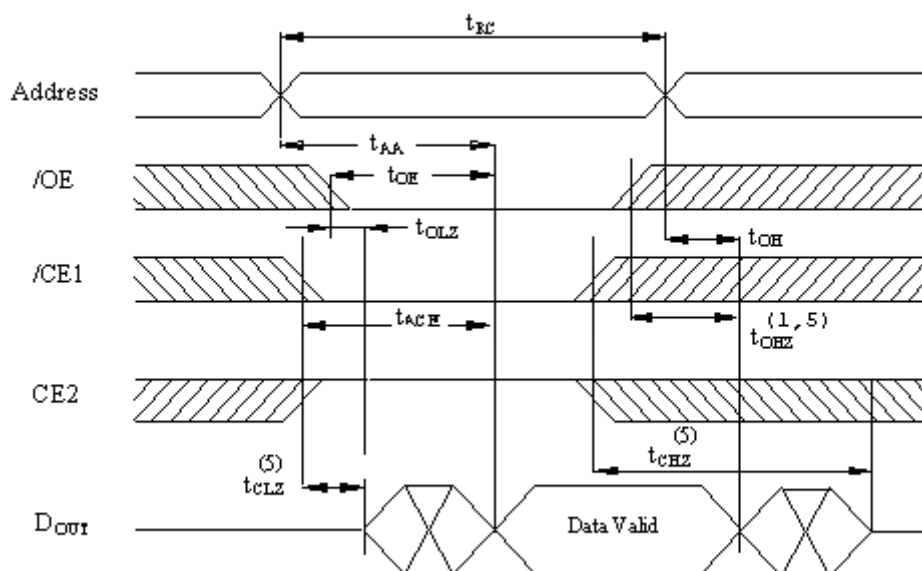



High Speed Super Low Power SRAM

8K-Word By 8 Bit

CS18LV00645

NOTES:

1. /WE is high in read Cycle.
2. Device is continuously selected. When /CE1 = V_{IL} and CE2 = V_{IH} .
3. Address valid prior to or coincident with /CE1 transition low and /or CE2 transition high.
4. /OE = V_{IL} .
5. Transition is measured $\pm 500\text{mV}$ from steady state with $C_L = 5\text{pF}$ as shown in Figure 1B. The parameter is guaranteed but not 100% tested.

■ AC ELECTRICAL CHARACTERISTICS ($0^\circ\text{C} \sim 70^\circ\text{C}$; $V_{CC}=5\text{V}$) < WRITE CYCLE >

JEDEC Name	Symbol	Description	-55		-70		Unit
			MIN	MAX	MIN	MAX	
t_{AVAX}	t_{WC}	Write Cycle Time	55		70		ns
t_{E1LWH}	t_{CW}	Chip Select to End of Write	55		70		ns
t_{AVWL}	t_{AS}	Address Setup Time	0		0		ns
t_{AVWH}	t_{AW}	Address Valid to End of Write	55		70		ns
t_{WLWH}	t_{WP}	Write Pulse Width	40		50		ns
t_{WHAX}	t_{WR}	Write Recovery Time	0		0		ns
t_{WLQZ}	$t_{WHZ}^{(10)}$	Write to Output in High Z		25		35	ns
t_{DVWH}	t_{DW}	Data to Write Time Overlap	20		30		ns
t_{WHDX}	t_{DH}	Data Hold for Write End	0		0		ns
t_{GHQZ}	$t_{OHZ}^{(10)}$	Output Disable to Output in High Z	0	30	0	30	ns
t_{WHOX}	$t_{OW}^{(10)}$	End of Write to Output Active	5		5		ns




High Speed Super Low Power SRAM

8K-Word By 8 Bit


CS18LV00645

SWITCHING WAVEFORMS (WRITE CYCLE)

WRITE CYCLE1 (Write Enable Controlled)

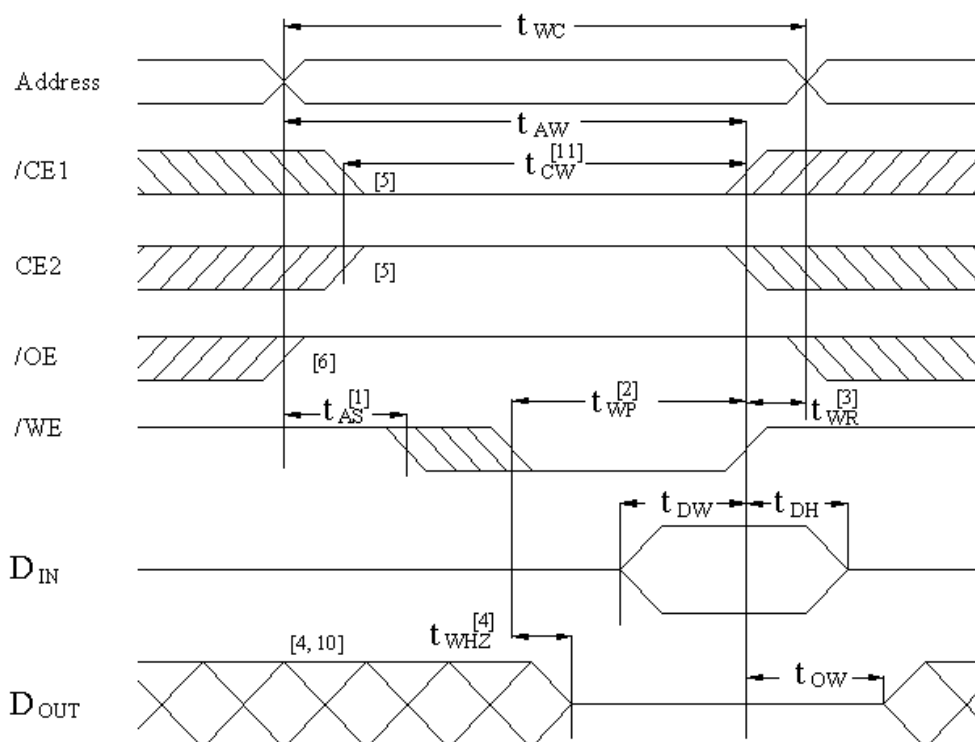

WRITE CYCLE2 (Chip Enable Controlled)

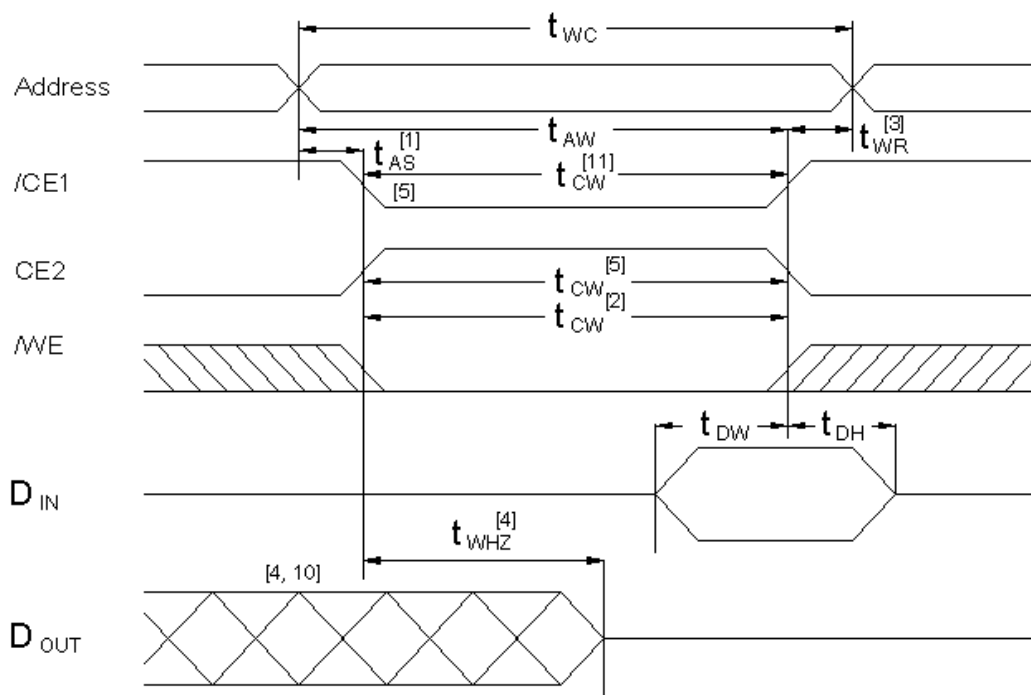



High Speed Super Low Power SRAM

8K-Word By 8 Bit


CS18LV00645

NOTES:

1. T_{AS} is measured from the address valid to the beginning of write.
2. The internal write time of the memory is defined by the overlap of $/CE1$ and $CE2$ active and $/WE$ low. All signals must be active to initiate a write and any one signal can terminate a write by going inactive. The data input setup and hold timing should be referenced to the second transition edge of the signal that terminates the write.
3. T_{WR} is measured from the earlier of $/CE1$ or $/WE$ going high or $CE2$ going low at the end of write cycle.
4. During this period, DQ pins are in the output state so that the input signals of opposite phase to the outputs must not be applied.
5. If the $/CE1$ low transition or $CE2$ high transition occurs simultaneously with the $/WE$ low transitions or after the $/WE$ transition, output remain in a high impedance state.
6. It's recommended to keep $/OE$ at high ($/OE = V_{IH}$) as $/WE$ Controlled WRITE CYCLE.
7. D_{OUT} is the same phase of write data of this write cycle.
8. D_{OUT} is the read data of next address.
9. If $/CE1$ is low and $CE2$ is high during this period, DQ pins are in the output state. Then the data input signals of opposite phase to the outputs must not be applied to them.
10. Transition is measured $\pm 500mV$ from steady state with $C_L = 5pF$ as shown in Figure 1B. The parameter is guaranteed but not 100% tested.
11. T_{CW} is measured from the later of $/CE1$ going low or $CE2$ going high to the end of write.


■ ORDER INFORMATION

CS18LV00645 X X X X XX

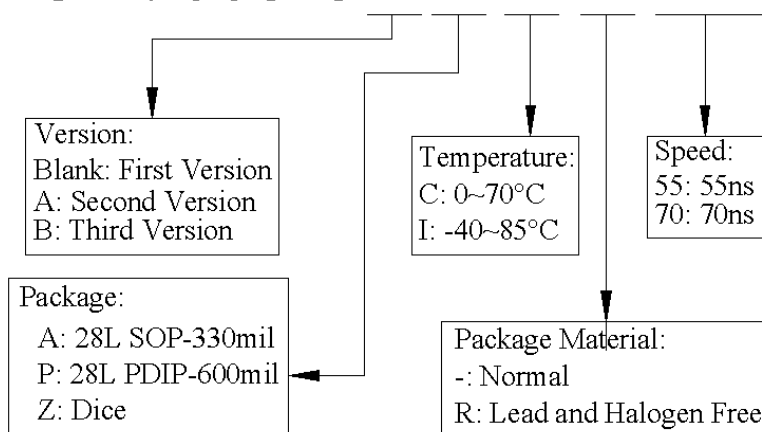

Note: Package material code "R" meets ROHS

■ PACKAGE DIMENSIONS - 28L SOP -330mil

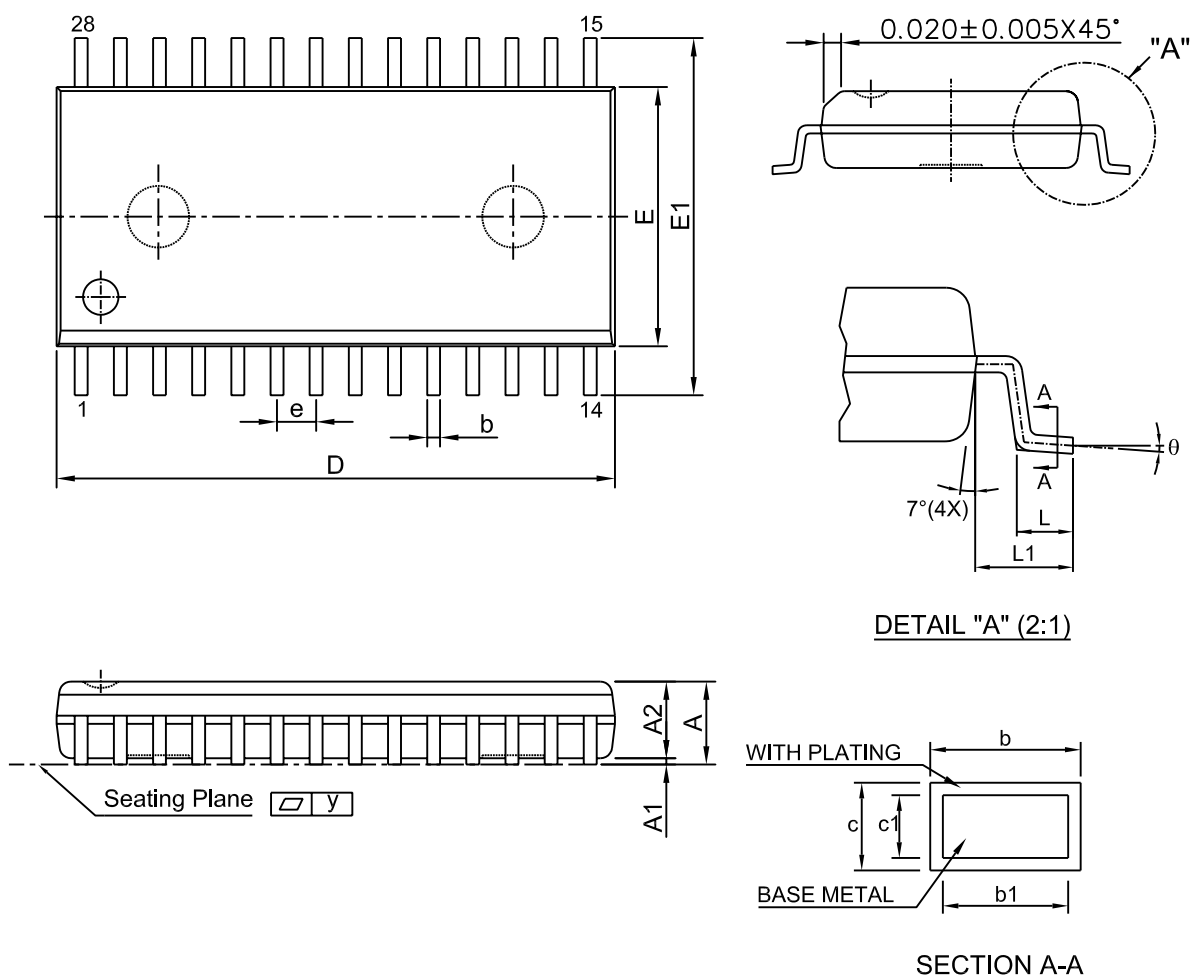

SYMBOL UNIT		A	A1	A2	b	b1	c	c1	D	E	E1	e	L	L1	y	Θ
mm	Min.	2.540	0.102	2.362	0.35	0.35	0.20	0.20	17.983	8.280	11.506	1.118	0.700	1.520	—	0°
	Nom.	2.692	0.226	2.489	—	—	—	—	18.110	8.407	11.811	1.270	0.964	1.720	—	—
	Max.	2.844	0.350	2.616	0.50	0.45	0.32	0.28	18.237	8.534	12.116	1.422	1.228	1.920	0.1	10°
inch	Min.	0.100	0.004	0.093	0.014	0.014	0.008	0.008	0.708	0.326	0.453	0.044	0.0276	0.0598	—	0°
	Nom.	0.106	0.009	0.098	—	—	—	—	0.713	0.331	0.465	0.050	0.0380	0.0677	—	—
	Max.	0.112	0.014	0.103	0.020	0.018	0.012	0.011	0.718	0.336	0.477	0.056	0.0484	0.0756	0.004	10°




High Speed Super Low Power SRAM

8k-Word By 8 Bit

CS18LV00645

■ PACKAGE DIMENSIONS - 28L PDIP -600mil

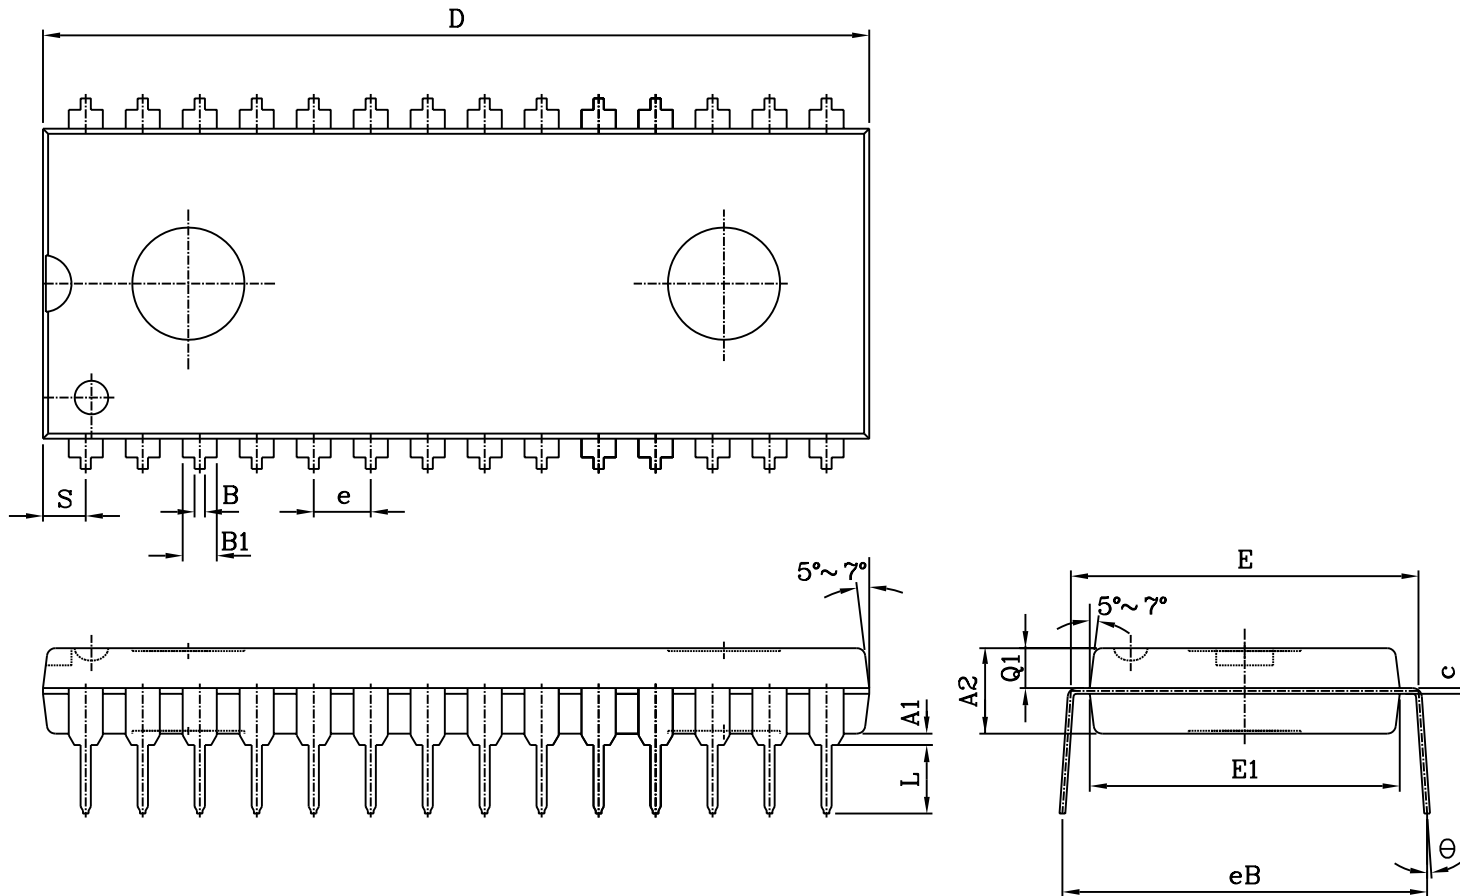

SYMBOL UNIT		A1	A2	B	B1	c	D	E	E1	e	eB	L	S	Q1	θ
mm	Min.	0.254	3.683	0.330	1.270	0.152	36.957	14.986	13.716	2.540 (TYP)	15.748	3.048	1.778	1.651	3°
	Nom.	—	3.810	0.457	1.524	0.254	37.084	15.240	13.818		16.256	3.302	2.032	1.778	6°
	Max.	—	3.937	0.584	1.778	0.356	37.211	15.494	13.920		16.764	3.556	2.286	1.905	9°
inch	Min.	0.010	0.145	0.013	0.050	0.006	1.455	0.590	0.540	0.100 (TYP)	0.620	0.120	0.070	0.065	3°
	Nom.	—	0.150	0.018	0.060	0.010	1.460	0.600	0.544		0.640	0.130	0.080	0.070	6°
	Max.	—	0.155	0.023	0.070	0.014	1.465	0.610	0.548		0.660	0.140	0.090	0.075	9°